

SL-30 / hal
h: 210mm
d: 170mm
w: 145mm

SL-30
h: 210mm
d: 135mm
w: 145mm

SL-30 / Tripod
h: 1800mm

PAR 30
240V 97mm dia.
75W 10°, 30°
100W 10°, 30°

CDM-R PAR
240V 97mm dia.
35W 10°, 30°
70W 10°, 30°

SL-20
h: 200mm
d: 150mm
w: 105mm

PAR 20
240V 64mm dia.
50W 10°, 30°

CDM-R PAR
240V 64mm dia.
35W 10°, 30°

SL-20 / T

SL-30 / T / P



Metal Halide

SL-20 / hal 240v fitting using 35W CDM-R ceramic metal halide lamp. Offers excellent colour rendering with very high lux levels and relatively low heat output. Remote or integral track electronic ballast supplied.

SL-30 / hal more powerful 70 Watt CDM-R version.

Halogen

SL-20 240v mains powered fitting accepting PAR 20 halogen lamp. Track or surface mounted.


SL-30 more powerful PAR 30 halogen lamp version. Also available with freestanding tripod.



SL-30 / C



SL-30 / hal / T

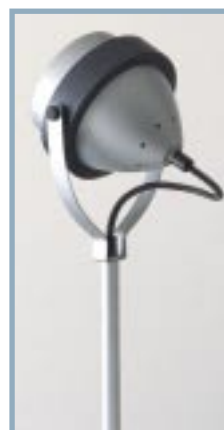

SL-30 / Tripod

OPTIONS

- /B2 surface fixing plate 78mm x 14mm
 - /C surface fixing plate 105mm x 16mm
 - /G surface mounted integral transformer either 60va or 105va
 - /T track adaptor (Nordic or Aktrac)
 - /P pendant lengths:100/150/200/300/500/600
- See fixings sheet for details

FINISHES

Standard: matt silver, white.

TRACKS

Nordic globaltrac base 240v 1m/2m/3m single circuit white, silver or black

Nordic globaltrac pro / Eutrac 240v 1m/2m/3m three circuit white, silver or black

Full Details - see track sheet