


search light mains

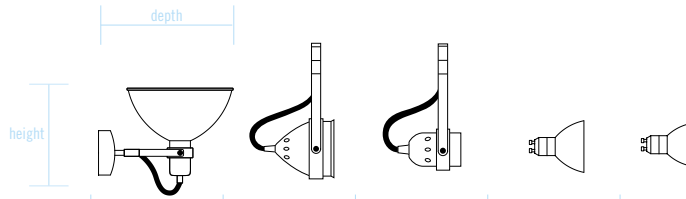

SL-210 / wall
h: 210mm
d: 270mm
w: 210mm

SL-210 / tripod
h: 1850mm

HI-SEARCH / 50
h: 185mm
d: 105mm
w: 120mm

HI-SEARCH / 40
h: 200mm
d: 120mm
w: 75mm

ES 63
240V 63mm dia.
75W 25°, 50°

HI-SPOT 50
240V 50mm dia.
50W 25°, 40°

Hi-search / 50 / T / Hi-Spot 50



SL-40

240v mains powered fitting accepts both PAR 20 and PAR 30 halogen lamps.

Hi search-40

Mains powered fitting with GU10 Lampholder using 75W ES63 compact halogen lamp.

Hi search-50

Mains powered fitting accepts the Hi-Spot 50 watt halogen lamp

Hi search/R

Recessed fitting in fixed or tilt adjustable types Hi-Spot 50 and ES63 versions available.

SL-210

Mains powered uplighter with 3 lamp options: single ended tungsten halogen, PAR 30 or standard GLS lamp. Wall and tripod versions offered.

OPTIONS

/D surface fixing plate ϕ 90mm x 35mm
/C surface fixing plate ϕ 105mm x 16mm
/T track adaptor (Nordic or Aktrac)
/P pendant lengths: 100/200/300/500/600
See fixings sheet for details

FINISHES

Standard: matt silver, white.
Special finishes on request.

TRACKS

Nordic globaltrac base 240v 1m/2m/3m single circuit
white, silver or black

Nordic globaltrac pro / Eutrac 240v 1m/2m/3m three circuit
white, silver or black

Full Details - see track sheet



Hi Search / 40/ B / ES63



Hi Search / R / Fixed / Hi-Spot 50



Hi Search R / Adjustable / Hi-Spot 50



SL-210 / Wall

